



# 6 Block Dry Block Heaters



Ph 0800 27 26 26

info@ansutek.co.nz  
www.ansutek.co.nz  
www.ansutekbiz.co.nz



## *Process more samples with large capacity Block Heaters that deliver precise and reliable results*

Versatile Dry Block Heaters are ideal for applications that require temperature stability. Close tube-to-block contact enables maximum heat retention, resulting in efficient heating. Digital models offer exceptional temperature uniformity and stability for repeatable results, while non-digital models are an economical choice. All units hold optional interchangeable modular blocks with over 40 choices. Blocks are easy to use, no tools required.

### **Standard Features:**

- **Delivering Flexibility for High Throughput Sample Processing**  
Unique design for high throughput applications. The six block capacity allows you the most flexibility to process multiple samples simultaneously with one device.
- **Calibrate to an External Temperature Device with Temperature Calibration Mode**  
Digital models with user calibration feature allows you to match the Block Heater's display to your known external temperature standard which improves the temperature accuracy of the system.
- **Accurate and Fast Sample Heating with PID Microprocessor Temperature Control**  
Digital models feature easy to use touchpad controls with independent displays for temperature and time. Robust non-Digital models are controlled with dual temperature adjustment knobs.

# 6 Block Dry Block Heaters

Model	HB6AL	HB6DG
Control	Non-Digital	Digital
Temperature Range	Low Ambient + 5 °C – 100 °C; High 75 °C – 150 °C	Ambient + 5 °C – 120 °C
Stability @ 37 °C	+/-2°C (120V) +/-2.5°C (230V)	+/-0.1°C (120V) +/-0.2°C (230V)
Uniformity within the block @ 37 °C	+/-0.1°C (120V) +/-0.4°C (230V)	+/-0.1°C (120V) +/-0.2°C (230V)
Heat Up Time to 100 °C	≤ 30 min	
Temperature Calibration	NA	.
Number of Blocks	6	
Overshoot Protection	NA	10 °C above set point
Working Environment	18 °C – 33 °C, 20% – 80% relative humidity, non-condensing	
Power	230V, 1.79A, 50/60Hz	
Power Consumption	410 W	
Dimensions (W × L × H)	203 × 531 × 89 mm	
Net Weight	4.4 kg	

## Other Standard Features and Equipment

Touchpad control and audible alarm (digital model), painted steel housing, digital model includes support rod holder with locking knob, detachable 3-wire cord and plug (included)

## Compliance


- **Product Safety:** EN 61010-1, EN 61010-2-051
- **Electromagnetic Compatibility:** EN 61326-1 Class A, Industrial Environments
- **Compliance Marks:** CE; RCM; TÜV SÜD

## Accessories

Module Block 10 mm Test Tube, 24 Wells .....	30400151	Sand Bath, 6 Block Unit.....	30400176
Module Block 12/13 mm, 20 Wells .....	30400152	Sand, 0.5 kg Bag.....	30400177
Module Block 15/16 mm, 12 Wells .....	30400153	Stainless Steel Shot, 0.5 kg .....	30400178
Module Block 20 mm Test Tube, 8 Wells.....	30400154	Cover Low-Temperature 6 Block .....	30400181
Module Block 25 mm Test Tube, 6 Wells.....	30400155	Module Block For Vials 12 mm, 20 Wells .....	30400182
Module Block Combo - Test Tube Combination Block:		Module Block For Vials 15 mm, 20 Wells .....	30400183
6 mm, 12/13 mm, 25 mm .....	30400156	Module Block For Vials 17 mm, 12 Wells .....	30400184
Module Block 0.5 mL Microtaper, 30 Wells .....	30400157	Module Block For Vials 19 mm, 12 Wells .....	30400185
Module Block 6 mm Test Tube, 30 Wells.....	30400158	Module Block For Vials 21 mm, 9 Wells.....	30400186
Module Block 1.5 mL Microtaper, 20 Wells .....	30400159	Module Block For Vials 23 mm, 8 Wells.....	30400187
Module Block Solid.....	30400160	Module Block For Vials 25 mm, 8 Wells.....	30400188
Module Block Cuvette - 12 Cuvet, 2 Wells .....	30400161	Module Block For Vials 28 mm, 6 Wells.....	30400189
Module Block 11.5/1.5 mL Microcentrifuge, 20 Wells		Module Block For Vials 16 mm, 15 Wells .....	30400190
.....	30400162	Module Block, 2.0 mL Tube, 20 Wells.....	30400191
Module Block 250 Microliter/6 mm, 30 Wells....	30400163	Module Block, 2.0 mL Corning Tube, 20 Wells...	30400192
Module Block Titer Plate.....	30400164	Module Block Combo - Centrifuge Tube Configuration:	
Module Block 12/13 mm, 16 Wells .....	30400165	50 mL-2 Wells, 15 mL-3 Wells, 1.5 mL-4 Wells...	30400193
Module Block Solid Double.....	30400166	Module Block Combo - Micro Tube Combination:	
Module Block 35 mm Test Tube, 4 Wells.....	30400167	2 mL-5 Wells, 1.5 mL-10 Wells, 0.5 mL-6 Wells ..	30400194
Module Block 50 mL Conical Centrifuge, 5 Wells	30400168	Module Block 17/18 mm, 12 Wells .....	30400195
Module Block 0.2 mL Micro, 80 Wells .....	30400169	Stainless Steel Probe Kit*.....	30400246
Module Block 0.2 mL Micro, 64 Wells .....	30400170		
Module Block 0.2 mL 96 Hole Double Block.....	30400171		

\*NA for HB6AL

## Dimensions

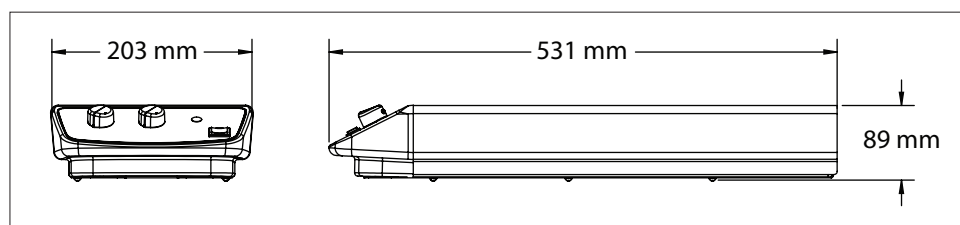

info@ansutek.co.nz  
www.ansutek.co.nz  
www.ansutekbiz.co.nz

The management system governing the manufacture of this product is ISO 9001:2015 certified.

30385220

