



SRP-275III

3 inch Impact Dot POS Printer



info@ansutek.co.nz
www.ansutek.co.nz
www.ansutekbiz.co.nz


Simply Drop-in

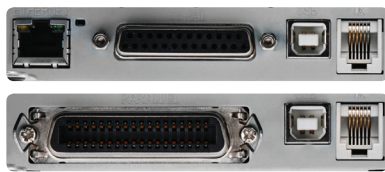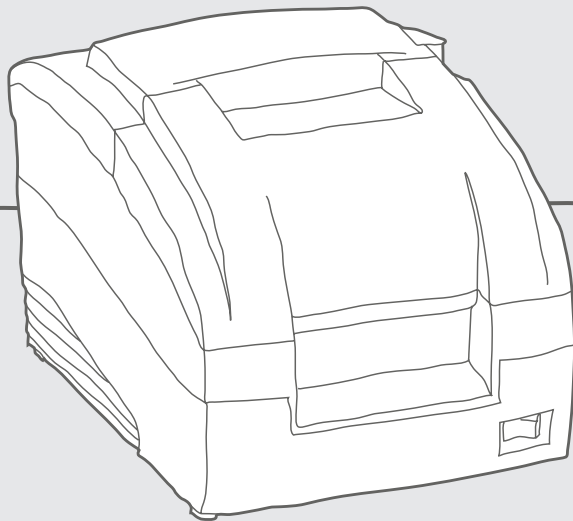

Built-in Interface

- USB + Ethernet + Serial
- USB + Parallel

2-color



Powerful Printing Performance

- Fast printing speed up to 5.1 lps (at 40 columns) 8.5% faster than competitive models
- High reliability mechanism (1.8 Million Cuts)
- Two-color printing, quality printing of fonts, graphics



User-friendly Design

- Anti-jam technology
- Internal kitchen buzzer & built-in SMPS
- Simply drop-in paper loading
- Stand-alone and wall-mount option



SRP-275III

3 inch Impact Dot POS Printer

Specifications

Print Characteristics

Print Method

9 Pin
Serial Dot Matrix

Print Speed

5.1 lps (at 40 columns)

Print Resolution

80 dpi (horizontal)
144 dpi (vertical)

Print Width

Up to 63.5 mm

Sensor

Paper End, Paper Near End, Wall Mounting Paper
Near End, Rear Cover Open, Black Mark

Media Characteristics

Media Type

Receipt

Media Width

76.5 mm

Media Roll Diameter

Up to 83 mm

Media Thickness

0.06 ~ 0.085 mm

Supply Method

Easy Paper Loading

Physical Characteristics

Dimensions (WxLxD)

160 x 239 x 157 mm
(6.29 x 9.40 x 6.18 inch)

Weight

A: 2.4 kg (5.29 lbs.)
C: 2.5 kg (5.51 lbs.)

Power

EnergyStar Certified,
External Power Adaptor 100-240V AV, 50/60Hz

Drawer Port

2 ports (via y-type adaptor)

Performance Characteristics

Memory

64 Mbit SDRAM, 16 Mbit FlashROM

NV Image Memory

256 Kbytes (mono)

Receive Buffer

64 Kbytes

User Define Buffer

64 Kbytes

Interface

Max. Triple Interface
USB V2.0 FS + Serial + Ethernet*
USB V2.0 FS + Parallel
* DHCP enabled

Environment Characteristics

Temperature

Operating: 0 ~ 40°C (32 ~ 104°F)
Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity

Operating: 10 ~ 80% RH
Storage: 10 ~ 90% RH

Reliability

Thermal Print Head (TPH)

300 Million Dots/Wire

Auto Cutter

1.5 Million Cuts

Software

Emulation

BXL / POS

Driver / Utility

Windows Driver, OPOS Driver, JPOS Driver,
Linux / Mac CUPS Driver,
Virtual COM USB/Ethernet Driver, Utility Program

SDK

iOS SDK, Android SDK

Fonts / Graphics / Symbologies

Character Size

Font A: 9 x 9 Font B: 7 x 9 KOR: 17 x 9 CHN: 16 x 16

Characters Per Line

Font A: 35 Font B: 40 KOR: 20 CHN: 22

Character Sets

Alphanumeric: 95
Extended Graphics: 128 x 27 page
International: 48

Graphics

Supporting user-defined fonts, graphics, formats,
and logos

Accessories

Optional

Wall Mount (RWM-350)
Splash Proof Cover (RSC-275)
Ribbon Cartridge (GRC-201B/GRC-201BR)
B-Melodist (RMB-100)
External Buzzer (RBC-100)



info@ansutek.co.nz
www.ansutek.co.nz
www.ansutekbiz.co.nz

BR-SRP-275III-EN-JAN16-V1

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

BIXOLON®

BIXOLON Co., Ltd.
+82 (0) 31 218 5500
sales@bixolon.com

BIXOLON America Inc.
+1 858 764 4580
sales@bixolonusa.com

BIXOLON Europe GmbH
+49 211 68 78 54 0
sales@bixolon.de

www.bixolon.com

