

# SRP-330II

## 3 inch Thermal POS Printer



info@ansutek.co.nz  
www.ansutek.co.nz  
www.ansutekbiz.co.nz



Retail



Hospitality



Ticketing





Banking



Kiosk

# Durable and Cost-Efficient

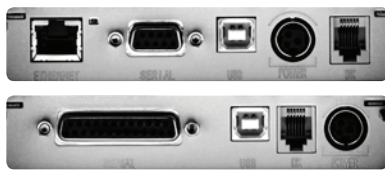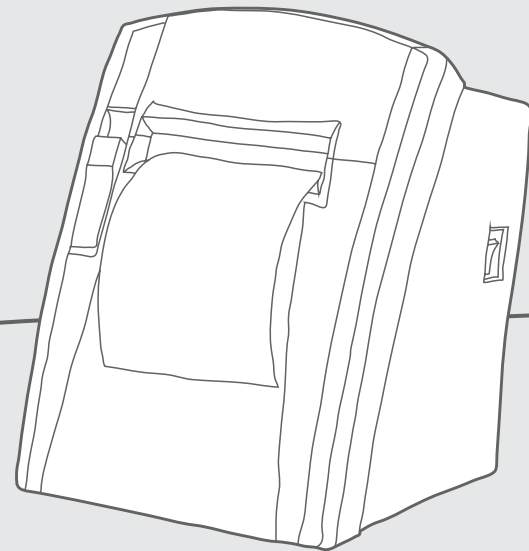

### Cost-Efficiency

- All in one Plus™ Interface
  - Triple Interface  
USB V2.0 FS + Ethernet + Serial
  - Dual Interface  
USB V2.0 FS + Serial  
USB V2.0 FS + Parallel  
USB V2.0 FS + SD
- Paper saving mode, reducing the length of a receipt up to 25%

220  
mm/sec

TPH  
150km



### Reliable Printing Performance

- Printing speed up 220 mm/sec
- High reliability mechanism :  
150 km TPH & 1.5 Million cuts Auto Cutter
- 203 dpi supported



Easy Tracking™



### User-Friendly Design

- Stand-alone or space-saving wall-mount use
- 2" or 3" paper choice
- 2 inch partition included
- Anti-jam guide
- Easy Tracking™ supports a QR code linking to the technical support micro site on a unique label plate found on the bottom of the printer

**BIXOLON**®  
a Better Solution for your Business™

# SRP-330II

## 3 inch Thermal POS Printer

### Specifications

#### Print Characteristics

**Print Method**

Direct Thermal

**Print Speed**

220 mm/sec

**Print Resolution**

SRP-330II: 180 dpi

SRP-332II: 203 dpi

**Print Width**

Up to 72 mm

**Sensor**

Paper End, Cover Open

#### Media Characteristics

**Media Type**

Receipt

**Media Width**

80 mm, 58 mm (with 2 inch Partition)

**Media Roll Diameter**

Up to 80 mm

**Media Thickness**

0.062 ~ 0.075 mm

**Supply Method**

Easy Paper Loading

#### Physical Characteristics

**Dimensions (W x L x D)**

145 x 198 x 146 mm

(5.72 x 7.79 x 5.74 inch)

**Weight**

1.37 kg (3.02 lbs.)

**Power**

EnergyStar Certified,

External Power Adaptor 100-240V AV, 50/60Hz

**Drawer Port**

2 ports (via y-type adaptor)

#### Performance Characteristics

**Memory**

64 Mbit SDRAM, 32 Mbit FlashROM

**NV Image Memory**

768 Kbytes (Mono)

**Receive Buffer**

4 Kbytes

**User Define Buffer**

12 Kbytes

**Interface**

- Triple Interface  
USB V2.0 FS + Ethernet + Serial
- Dual Interface  
USB V2.0 FS + Serial  
USB V2.0 FS + Parallel  
USB V2.0 FS + SD

#### Environment Characteristics

**Temperature**

Operating: 0 ~ 40°C (32 ~ 104°F)

Storage: -20 ~ 60°C (-4 ~ 140°F)

**Humidity**

Operating: 10 ~ 80% RH

Storage: 10 ~ 90% RH

#### Reliability

**Thermal Print Head (TPH)**

150 km

**Auto Cutter**

1.5 Million Cuts

**\*\*\* Specified Paper**

- TF50KS-E (Paper thickness: 65µm)  
: Nippon Paper industries Co., Ltd.
- PD 150R (Paper thickness: 75µm)  
: New Oji Paper Mfg. Co., Ltd
- PD 160R (Paper thickness: 75µm)  
: New Oji Paper Mfg. Co., Ltd.
- P350 (Paper thickness: 62µm)  
: Kansaki Specialty Paper, Inc. (USA)

#### Software

**Emulation**

BXL / POS

**Driver / Utility**

Windows Driver, OPOS Driver, JPOS Driver,  
Linux CUPS Driver, Mac Driver,  
Virtual COM USB/Ethernet Driver, Utility Program

**SDK**

iOS SDK, Android SDK

#### Fonts / Graphics / Symbologies

**Character Size**

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24

KOR, CHN, JPN: 24 x 24

**Characters Per Line**

SRP-330II: - Font A: 42 Font B, C: 56  
KOR, CHN, JPN: 21

SRP-332II: - Font A: 48 Font B, C: 64  
KOR, CHN, JPN: 24

**Character Sets**

Alphanumeric: 95

Extended Graphics: 128 x 33 page

International: 32

**Graphics**

Supporting user-defined fonts, graphics, formats,  
and logos

**Barcode Symbologies**

1D: Coda Bar, Code39, Code93, Code128, EAN-8,  
EAN-13, ITF, UPC-A, UPC-E

2D: Data Matrix, PDF417, QR Code

#### Fonts / Graphics / Symbologies

**Standard**

2 inch Partition

**Optional**

USB A-B Cable, External buzzer, B-Melodist



info@ansutek.co.nz  
www.ansutek.co.nz  
www.ansutekbiz.co.nz



BR-SRP-330II-EN-APR16-V1

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

**BIXOLON**®

**BIXOLON Co., Ltd.**  
+82 (0) 31 218 5500  
sales@bixolon.com  
www.Bixolon.com



**BIXOLON America Inc.**  
+1 858 764 4580  
sales@bixolonusa.com  
www.BixolonUSA.com



**BIXOLON Europe GmbH**  
+49 211 68 78 54 0  
sales@bixolon.de  
www.BixolonEU.com

