



info@ansutek.co.nz  
www.ansutek.co.nz  
www.ansutekbiz.co.nz

POS & ECR Checkout Scale

# PDN series



## Checkout Scales for POS/ECR System

Low profile and space-efficient design. Bright LED display with good visibility.



Connected to POS/ECR system



Tilt Display, Low profile



Easy to Read with Bright LED Display




## FEATURES



### > Interface & Power Source

USB for Power Source and Communication

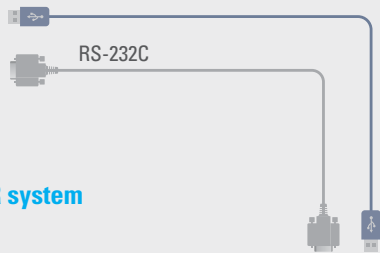

### > Connected to POS/ECR system

### > PDN-R Remote Dual Display



Rear Display

Up to 2 m

### > Square Edge Tray (Option)



### > Display


Tilt Display (Option to sit flush or tilt outwards)  
Bright LED Display

Side/Rear Display

## SPECIFICATION

| Model                 | PDN   |           |            |
|-----------------------|---|-----------|------------|
|                       | Dual Interval                               |           |            |
| Capacity (kg)         | Max. 3/6                                    | Max. 6/15 | Max. 15/30 |
| Readability (g)       | 1/2   | 2/5       | 5/10       |
| Internal Resolution   | 1/60,000                                    | 1/60,000  | 1/60,000   |
| External Resolution   | 1/3,000                                     | 1/3,000   | 1/3,000    |
| Max. Tare (kg)        | -2.999                                      | -5.998    | -14.995    |
| Display               | 94 x 28 mm, 6 Digit LED                     |           |            |
| Remote Display        | 94 x 28 mm, 6 Digit LED                     |           |            |
| Symbols               | STABLE, ZERO, TARE, kg                      |           |            |
| Keys                  | ZERO, TARE, FUNCTION                        |           |            |
| Functions             | Weighing, Interface Protocol                |           |            |
| Dimensions            | 384(W) x 308.4(D) x 81.8(H) mm              |           |            |
| Platter Size          | 380(W) x 280(D) mm                          |           |            |
| Weight                | 5.6 kg                                      |           |            |
| Power                 | USB Cable 5V                                |           |            |
| Operating Temperature | -10°C ~ +40°C                               |           |            |
| Option                | Square Edge Tray, PDN-R Remote Dual Display |           |            |

## DIMENSION

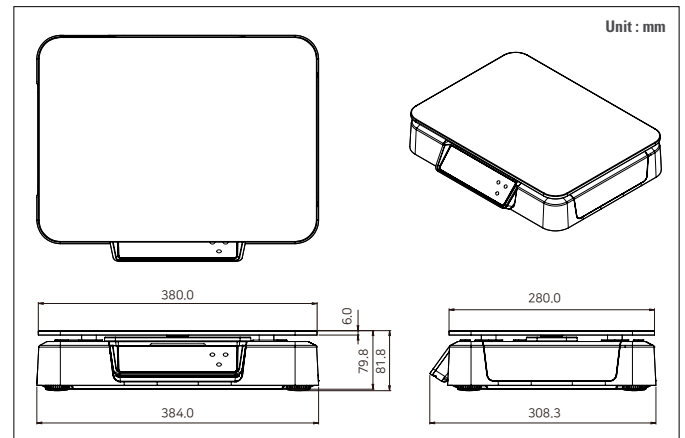

PDN Basic Type



PDN-R Remote Dual Display



info@ansutek.co.nz  
www.ansutek.co.nz  
www.ansutekbiz.co.nz



\* Specifications are subject to change without notice improvement.

